

# Clamping head adapter

Accessories



**Clamping head adapter**

Large workpieces – large chucks – large clamping heads. So far so good, but sometimes you also have to machine smaller workpieces? Instead of buying large clamping heads with a small diameter, there is now a better alternative: the clamping head adapter.

For example, it can basically turn a size 100 chuck into a size 65 chuck and you can then change your normal size 65 heads using this clamping head adapter. Your advantages are in-stock availability and a lower price for the smaller clamping heads. You also save the costs of purchasing new large clamping heads if you are already using smaller clamping heads.

Changing the clamping head adapter is fast and easy with the suitable changer interface.

**Key advantages**

- Smaller clamping heads can be used in larger chucks [size 100, 125 and 160]
- Use existing clamping heads [size 65 and 100]
- Fast and easy change-over

**Your benefits**


- Reduced costs due to use of smaller clamping heads
- Smaller clamping heads can be kept in stock for faster availability
- Covers a larger range of clamping diameters
- Productivity boost and saving of time due to faster change-over between large and small clamping diameters
- Flexible production since single clamping heads can be used on multiple machines



**Clamping head adapter SE in detail**




**Clamping head adapter RD in detail**

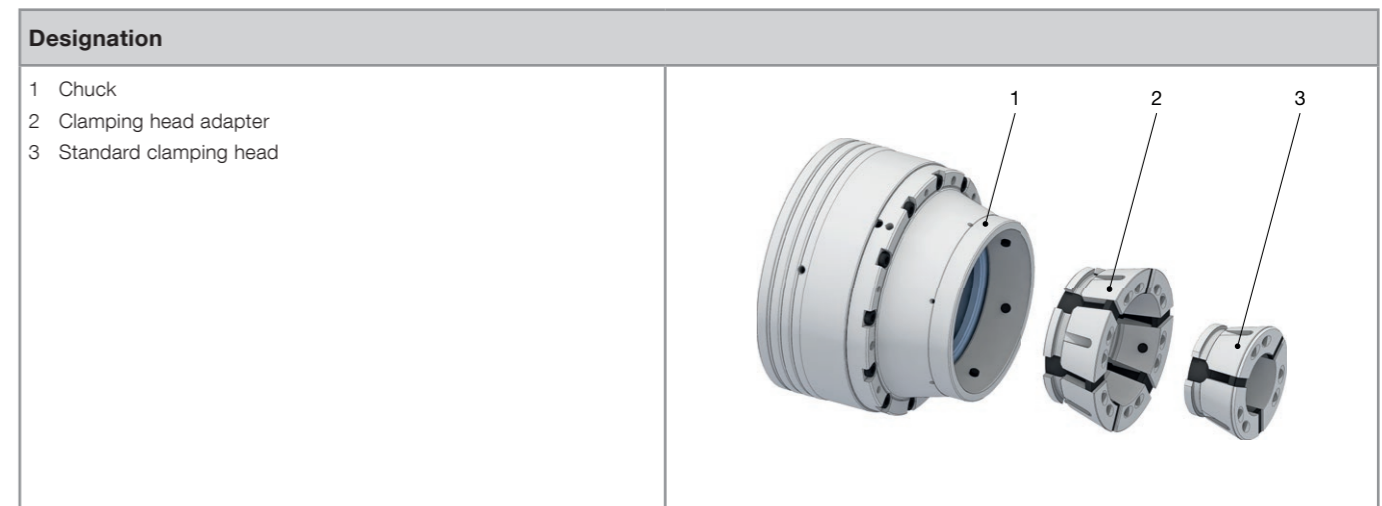

### Clamping head adapter

#### Clamping head adapter SE. Technical Data

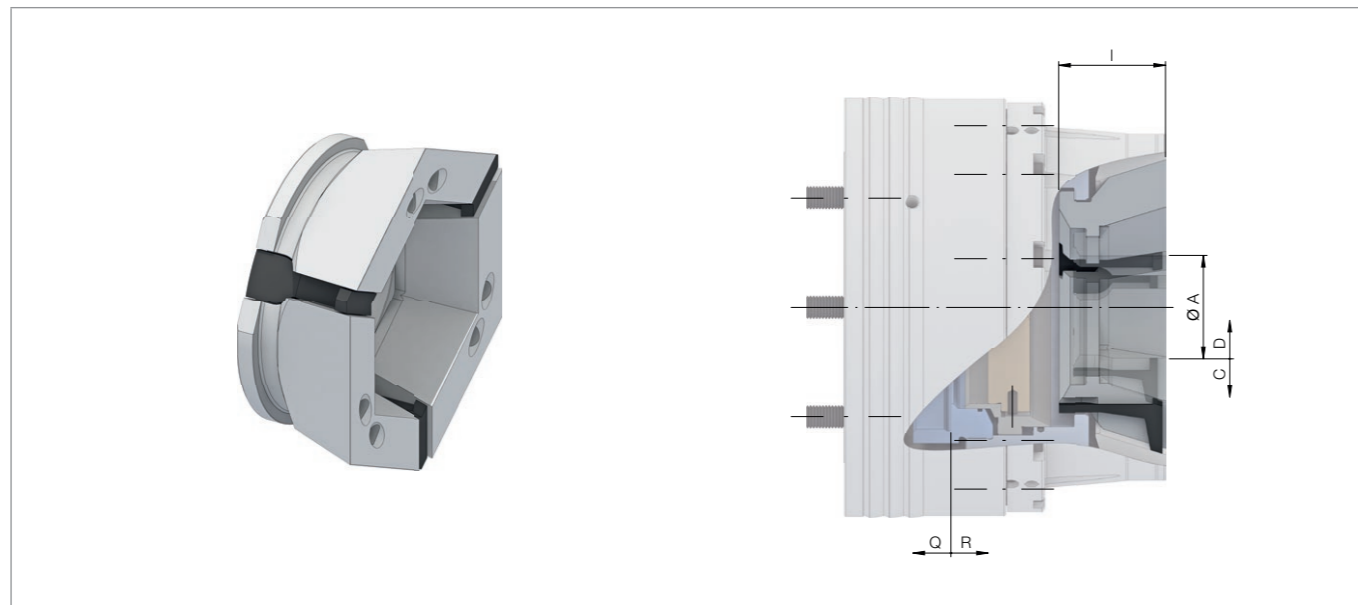


Size	100	160
<b>Adaptation size</b>	<b>65</b>	
Run-out ≤ [mm]	0,030	
Max. radial clamping force on the clamping head [kN]	85	
Max. axial drawtube force [pull / push] [kN]	45	
RPMA n max. [1/min.]	5000	3200
Clamping range [mm] A	3 – 65	
Reserve stroke in Ø [mm] D	1	
Release stroke in Ø [mm] C	0,6	
Range / recommended workpiece tolerance [mm]	± 0,5	
Reserve stroke axial [mm] Q	2	
Release stroke axial [mm] R	2,5	
Total length [mm] I	56,5	57,5
Weight [kg]	2,7	6,7
In stock	✓	✓
Material	10017477	10017478

Important: Never exceed the usable clamping reserve in the diameter!

The run-out refers to the workpiece in clamped state, including the clamping head.

### Clamping head adapter

#### Clamping head adapter RD. Technical Data

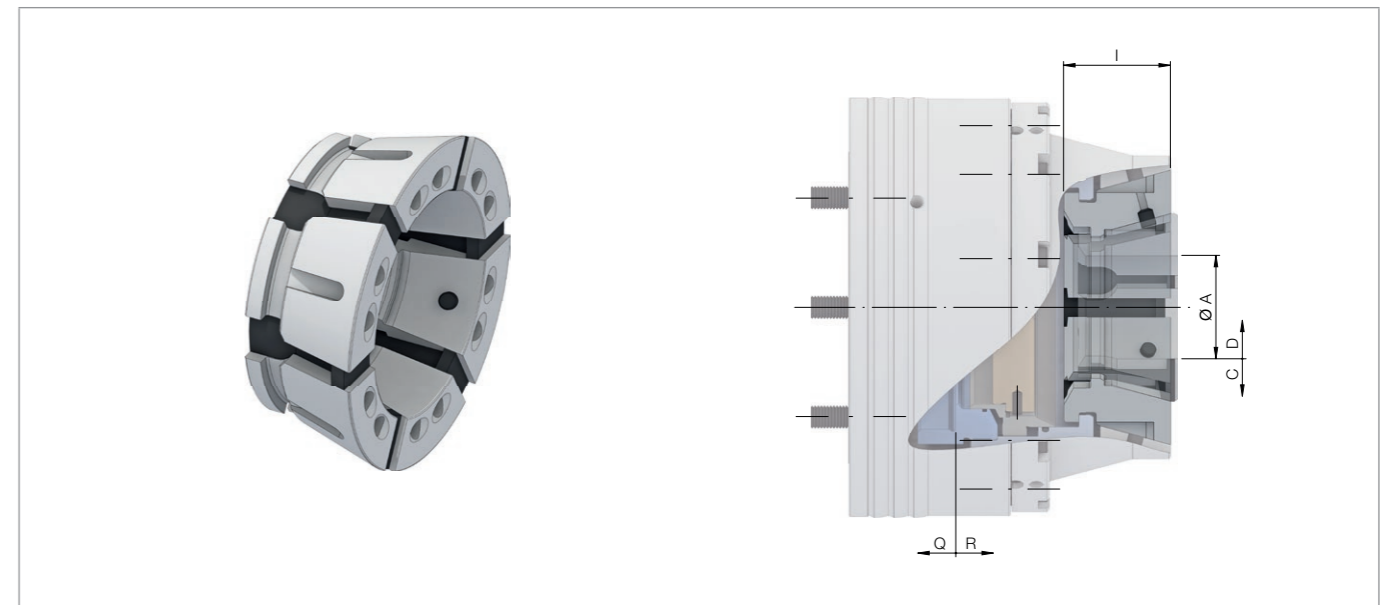

Size	100	125	160
<b>Adaptation size</b>	<b>65</b>		<b>100</b>
Run-out ≤ [mm]	0,030	0,035	0,040
Max. radial clamping force on the clamping head [kN]	90		127
Max. axial drawtube force [pull / push] [kN]	45		65
RPMA n max. [1/min.]	3900		3200
Clamping range [mm] A	3 – 65		15 – 100
Reserve stroke in Ø [mm] D		1	
Release stroke in Ø [mm] C	0,6		1,6
Range / recommended workpiece tolerance [mm]	± 0,5		± 0,7
Reserve stroke axial [mm] Q		2	
Release stroke axial [mm] R	2,5		4
Total length [mm] I	56,5	59,5	59
Weight [kg]	2,5	5,7	7,5
In stock	✓	✓	✓
Material	10018455	10017475	10017476

Important: Never exceed the usable clamping reserve in the diameter!

The run-out refers to the workpiece in clamped state, including the clamping head.



■ **Utilis AG, Präzisionswerkzeuge**

Kreuzlingerstrasse 22, CH-8555 Müllheim

Fon +41 52 762 62 62, Fax +41 52 762 62 00

[info@utilis.com](mailto:info@utilis.com), [www.utilis.com](http://www.utilis.com)